

Air Quality  
for the highest demands

**M - Series**




Specifications

Model	Rated Voltage (V)	Input (w)	Airflow (m3/h)	Noise (db)	Size (mm)	RPM
M - 4	220 - 240	15	100	33	100	2450
M - 6	220 - 240	25	320	37	150	2100



- **Automatic front shutter opening**
- Finest Quality ABS plastic material sourced from LG or equivalent
- Silicon steel motor with built in thermo cut off protection
- Excellent airflow and quiet
- Easy installation for wall and glass application
- Available in White

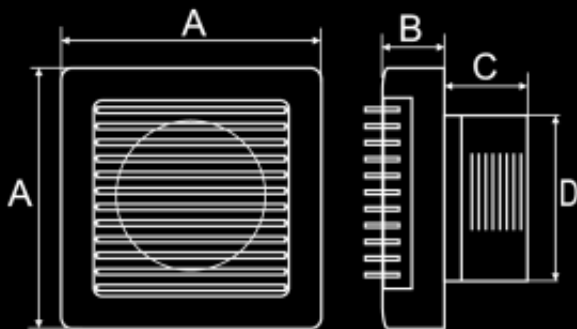

Dimensions (mm)



Double Ball Bearing Motor



Silent Operation



Auto Cut off Protection

Model	A	B	C	D
M - 4	150 X 150	50	40	97
M - 6	195 X 200	60	60	146