

Air Quality
for the highest demands




Tornado

Specifications

Model	Impeller diameter (mm)	Rated Voltage (v)	Rated Frequency (Hz)	Power (w)	Capacity (m3/h)	Speed (r/min)	Noise (db)
Tornado - 6	150	220-240	50	40	780	2800	<56
Tornado - 8	200	220-240	50	80	1300	2800	<62
Tornado - 10	250	220-240	50	100	2100	2800	<65

- Rugged and heavy duty
- Used in industrial & mining enterprises, civil buildings & kitchens
- Stainless steel blade with front grill
- High speed double ball bearings motor

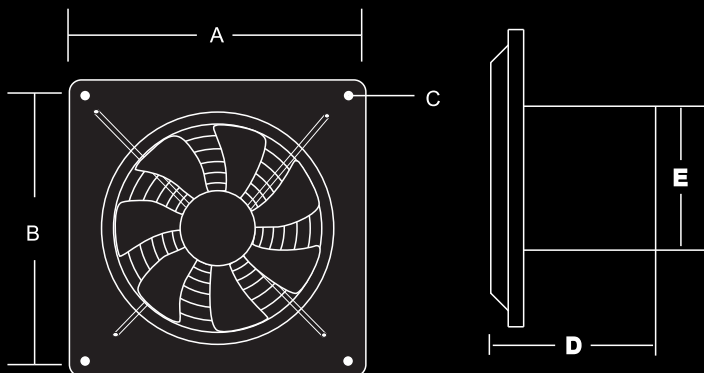

Double Ball Bearing Motor



Auto Cut off Protection

Dimensions (mm)

Model	A	B	C	D	E
Tornado - 6	190	182	6	140	150
Tornado - 8	250	215	6	150	200
Tornado - 10	310	262	12	165	250